

- NOTE:
- 1. INSERTION LOSS < 0.3dB.
  - 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
  - 3. DURABILITY: 500 CYCLES.
  - 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
  - 5. TENSILE STRENGTH: 10Kg.
  - 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

AE

Fiber Optical Patchcord

ST/PC to LC/PC Duplex Multimode 50/125, OM2, Ø3.0mm x4M-RoHS

Model: xxxxx-xxxxxx

Lot number: P01NO

Performance: (@23°C) A=850/1310±20nm

X X X X X X X X X X X X X X X X

SEE TABLE "DESCRIPTION 2"

(YOKE FACE UP)

Serial No

Insertion Loss ≤ 0.3dB

850nm

1310nm

A



B

C

D

Kymmmxxx

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

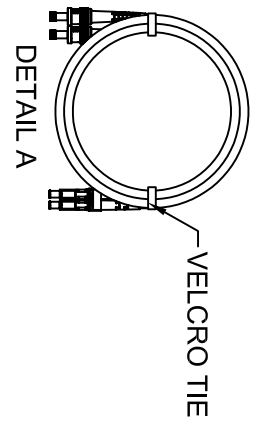


DETAIL B

y: Year, mm: Month

xxxxx: Serial Number

5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS		ST DUST COVER, CLEAR.
2	2SETS		CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.
ITEM	QTY	PART NO.	DESCRIPTION
PART LIST			



DRAWN BY  
Catherine

CHECKED BY

APPROVED BY

SALE BY

UNIT:  
Inches[mm]

DATE  
2007/10/4

DATE

DATE

DATE

TITLE:  
PATCHCORD ST-LC MULTIMODE  
DUPLEX 50/125, OM2, 3.0mm, ORANGE.

CUSTOMER

DRAWING NO.  
PK709018

CUSTOMER PART NO.  
RL75\*\*

Ref. NO.

REV.  
A

CUSTOMER APPROVAL:						DATE:	
RL7510	10	10	32.8'(10000)	913210-RL7510	8716065224337		
RL7505	05	5	16.4'(5000)	913205-RL7505	8716065224320		
RL7503	03	3	9.84'(3000)	913203-RL7503	8716065224313		
RL7502	02	2	6.56'(2000)	913202-RL7502	8716065224306		
RL7551	51	1.5	4.92'(1500)	9132015-RL7551	8716065224290		
RL7501	01	1	3.28'(1000)	913201-RL7501	8716065224283		
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2		